


## ECHO 180

### Engineered product specification



- IP 66
- IK 07
- Beam angle icons: 12°, 20°, 30°, 60°, 5x70°, 10x70°
- CRI 80
- CRI 90
- 12°
- 20°
- 30°
- 60°
- 5x70°
- 10x70°
- IES
- S' DOCS
- EGG
- DALI
- DMX 512
- 3000 K
- 4000 K
- RGBW
- FINISH
- Gray
- Custom
- 5 WARRANTY

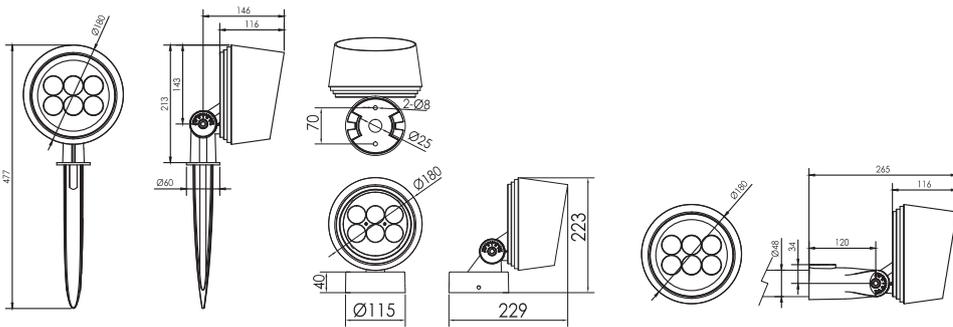

Power	22W	22W	30W	30W	30W
Luminous flux	1576lm	1779lm	2151lm	2425.5	1570lm
CCT	3000K	4000K	3000K	4000K	RGBW
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V	AC 220-240V	DC24V
Beam angles	12°, 20°, 30°, 60°, 10x70° & 5x20°				20° & 30°
CRI	80	80	80	80	
Surface mount Part No.	Echo180-223-CG-86	Echo180-223-CG-86	Echo180-304-CG-86	Echo180-304-CG-86	Echo180-30RGBW-CG-86
Including Spike Part No.	Echo180S-223-CG-86	Echo180S-223-CG-86	Echo180S-304-CG-86	Echo180S-304-CG-86	Echo180S-30RGBW-CG-86
Including Pole mount Part No.	Echo180P-223-CG-86	Echo180P-223-CG-86	Echo180P-304-CG-86	Echo180P-304-CG-86	Echo180P-30RGBW-CG-86