

ECHO 210

Engineered product specification

IP 66

IK 07

CRI 80

CRI 90

12°

20°

30°

60°

5x70°

10x70°

S' DOCS

IES

ECG

DALI

DMX 512

3000 K

4000 K


RGBW

FINISH

Gray

Custom

5 WARRANTY

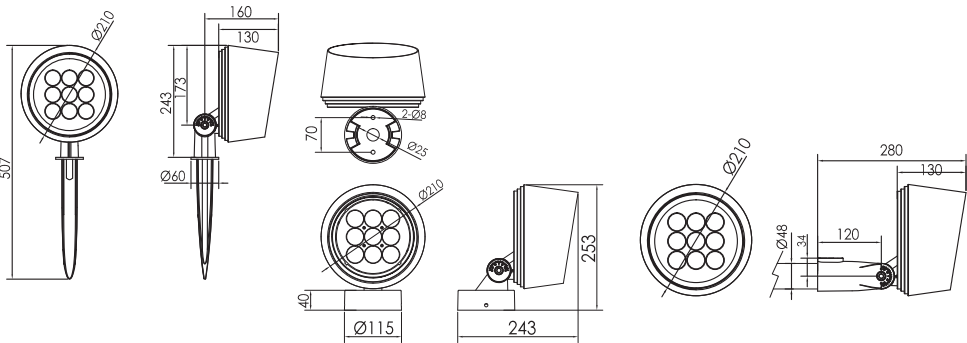

Power	35W	35W	45W	45W	45W
Luminous flux	2508lm	2830	3225lm	3638lm	2500lm
CCT	3000K	4000K	3000K	4000K	RGBW
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V	AC 220-240V	DC24V
Beam angles	12°,20°,30°,60°, 10x70° & 5x20°				20° & 30°
CRI	80	80	80	80	
Surface mount Part No.	Echo210-353-CG-86	Echo210-354-CG-86	Echo210-453-CG-86	Echo210-454-CG-86	Echo210-45RGBW-CG-86
Including Spike Part No.	Echo210S-353-CG-86	Echo210S-354-CG-86	Echo210S-453-CG-86	Echo210S-454-CG-86	Echo210S-45RGBW-CG-86
Including Pole mount Part No.	Echo210P-353-CG-87	Echo210P-354-CG-87	Echo210P-453-CG-86	Echo210P-454-CG-86	Echo210P-45RGBW-CG-86