






# WET63 DI

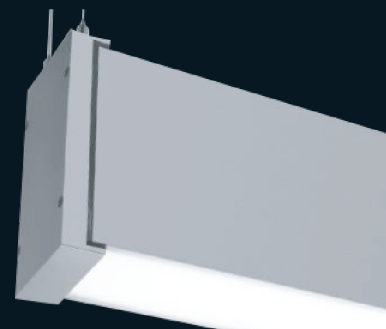

ITEMCODE	WATTAGE	COLOR TEMP	FINISH (MM)	LM
630274	2 X 37W	2700K	1000 X 117 X 63	4588LM/M
630374	2 X 37W	3000K	1000 X 117 X 63	4668LM/M
630474	2 X 37W	4000K	1000 X 117 X 63	4758LM/M



## Materials

 Extruded aluminium body, aluminium sealed end caps. Opal diffuser.



## Applications

Ideal to use in Airports, train stations, bus stations, malls, educational facilities, healthcare, swimming pools, pergolas and exterior applications.

## Options

- **Dimming:** DALI and DSI dimming  
1-10V dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire**
- **Customised wattages**
- **Emergency modules**
- **IP66**

## Features:

Suspended slim profile completely sealed to IP66 for indoor and outdoor in extreme conditions.

Up and down profile for direct and indirect lighting.

100mm incremental length.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI 85 as standard.

Integral driver.

Extruded architectural grade T6061 aluminium, 100% recyclable.

Life: 50,000 hours L90/B10.