


## DELTA 20


LITENET presents a dot free outdoor architectural lighting system for indoor or outdoor lighting application. The DELTA range is constructed with PMMA extrusion and sealed injection moulded end-caps to obtain IP67 rating. This fitting come with standard mounting accessories and custom powder coat colours are available up on request.

The DELTA range is a custom made linear architectural fitting which is designed with minimal trim and dual layer PMMA plastic diffuser which gives the fitting an IK09 and high light transmission this fitting can be assembled in the linear form for architectural lighting. This range comes with mounting accessories.


Non-dimmable ECG standard, Phase Dim/DALI is optional.  
50,000 hour life 5 with year warranty L70

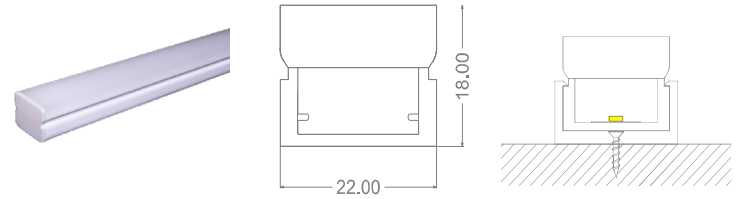


Part No. DE-Clip

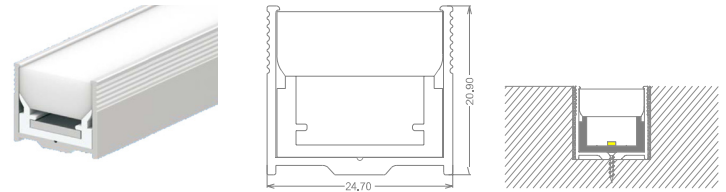

Part No. DE2017

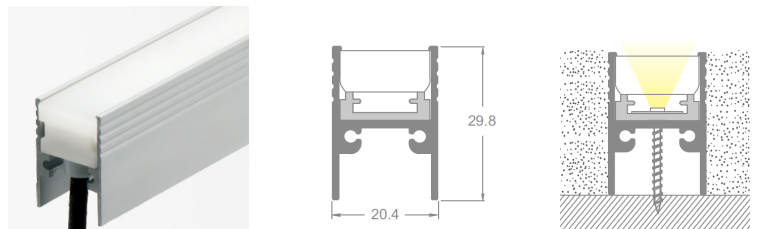


Part No. DE2030

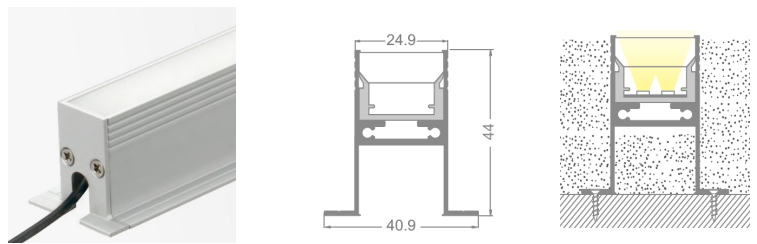

Part No. DE2044

### Cable Entry Details

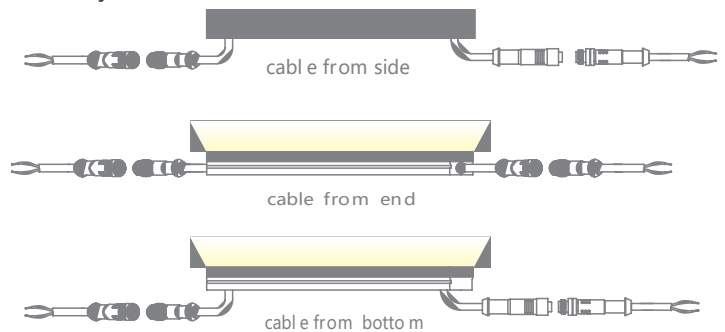

	SMD LED	3000K / 4000K
	DC24V	
	10-10V, DALI	
	21mm with aluminium	
	90°	
	IP 67	
	IK 09	
	S00CS	

Power	12W/m
LED	COB
Luminous flux 3K	694lm
Luminous flux 4K	721 lm
Dimensions	18mm x 14mm
Cut Out	21mm
Beam angles	90°
CRI	80
3000K Part No	DELTA20 10803
4000K Part No	DELTA20 10804
Extrusion Part No	DE2017 DE2030 DE2044