
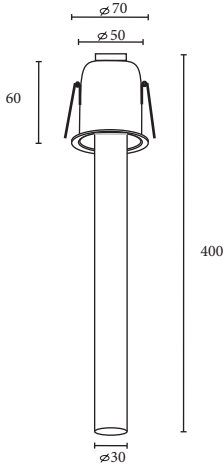



## HORUS 30R


Litenet presents an architectural recessed mounted down light. The Horus range of down lights are designed for commercial lighting applications. The Horus range of fixed down lights are low profiled and is suitable for many indoor lighting applications this range is available in satin white or matte black powdercoat finish. As a standard, this range comes with high quality COB LED technology with CRI80 upon request CRI90 can be made available.

The Horus range is designed with a stable heat sink with a high-grade aluminum to maximise heat dissipation which will intern maximise the life of the LED chip.

Non-dimmable ECG standard, Phase Dim/DALI is optional.  
50,000 hour life 5 with year warranty L70

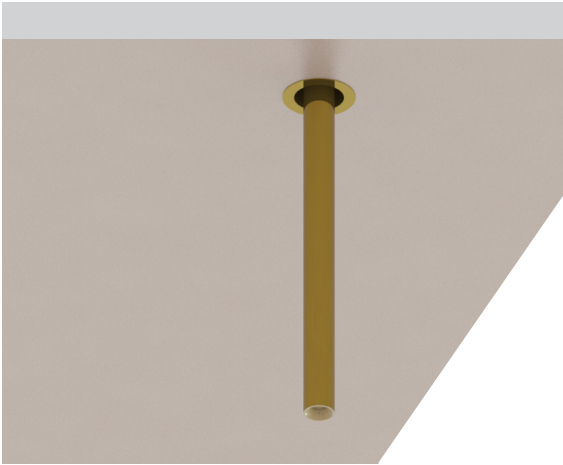

-  COB      3000K      4000K
-  DC12V      350mA      700mA
-  non Dim, 10-10V, DALI
-  60mm

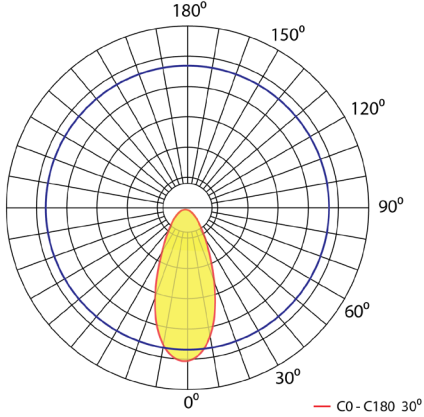

Power	5W	11W
LED	COB	COB
Output current	350mA	700mA
CCT	3000K or 4000K	3000K or 4000K
Luminous flux	431lm or 467lm	863lm or 935lm
Dimensions (D x H)mm	70x400mm	70x400mm
Beam angle	30°	30°
CRI	80	80
Part No	HORUS 30R 5803	HORUS 30R 11803
Part No.	HORUS 30R 5804	HORUS 30R 11804