


SENTINAL 24

LITENET presents Sentinel range of lighting system for outdoor lighting application. The Sentinel range is rated IP66 and pole mounted.

This is a commercial fitting that has optional photocell, surge protection and power-off protection available.

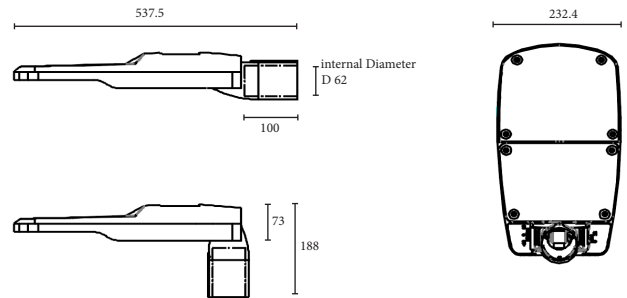

Power	5W	12W	16W	30W	50W
LED	SMD	SMD	SMD	SMD	SMD
Luminous flux 3K	666 lm	1600 lm	2000 lm	3950 lm	6666 lm
Luminous flux 4K	700 lm	1680 lm	2100 lm	4050 lm	7000 lm
Dimensions	437.5mm x 237.4mm x 73mm				
Mounting Height	4-6m	4-6m	4-6m	4-6m	4-6m
Beam angles	Street Light distribution Type I Type II, Type III ,Asymmetric forward throw, rectangular forward throw				
CRI	80	80	80	80	80
3000K Part No	SENTINAL24 5803	SENTINAL24 12803	SENTINAL24 30803	SENTINAL24 30803	SENTINAL24 50803
4000K Part No	SENTINAL24 5804	SENTINAL24 12804	SENTINAL24 30804	SENTINAL24 30804	SENTINAL24 50804

Available distribution

Street light distribution Type I, Type II, Type III	STLD1-60, STLD1-65, STLD1-70
Asymmetric side-throw	STLD1-70
Asymmetric forward-throw	ASFT
Asymmetric rectangular forward-throw	REFT


Optional accessories



Photocell



Power-off protection



Surge protection