

SHIELD II

The Shield II is a linear surface mounted LED luminaire. This well-crafted light fitting is well built to withstand the elements suitable for Chemical Plants, Agriculture and animal husbandry and food processing industrial lighting applications. The body of this fitting is made with Galvanized steel and coated with Anti-Static Polyurethane resin powder for added protection. There are three types of diffusers available frosted tempered glass rated at IK07 to attain protection against high chemical exposer.

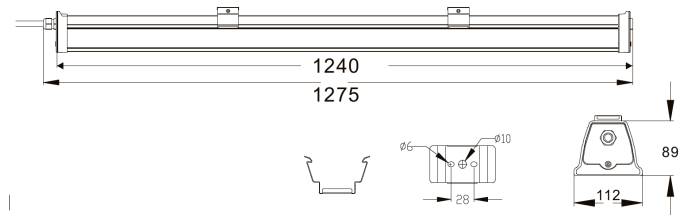
This fitting is designed with smooth curves to minimize water retention, which makes this fitting ideal for wet areas.




This fitting can be surface mounted or suspended. Custom brackets are available.

Colour Rendering Index 80 or 90

Non-dimmable ECG standard, DALI is optional

100,000 hour life span



-  SMD LED 3000K / 4000K
-  DC36V Earthed Led Driver
-  10-10V, DALI









Power	35W	35W	60W	60W
LED	SMD	SMD	SMD	SMD
Luminous flux 3K	N/A	N/A	N/A	N/A
Luminous flux 4K	4,260 lm	3,408lm	7,386lm	6,071lm
Dimensions	1275mm x 112mm X 89mm	1275mm x 112mm X 89mm	1275mm x 112mm X 89mm	1275mm x 112mm X 89mm
IP RATING	66	66	66	66
Beam angles	75°	75°	75°	75°
CRI	80	90	80	90
4000K Part No	SHIELD II 35804	SHIELD II 35904	SHIELD II 60804	SHIELD II 60904