


SYNC POD

Litenet presents SYNC POD a range of light fittings that can be used for a wide range of indoor or outdoor lighting applications, this range of powerful smart lights are designed for automated intelligent lighting system. The Sync Pod collection is a surface mounted fitting that has a wide range control options, ranging from standard non dim to full automated area lighting. This fitting is designed with reinforced polycarbonate body along with IP65 IK09.



The Sync Pod range is designed with a serviceable generous heat sink to maximise heat dissipation which will intern maximise the life of the LED chip.

Non-dimmable ECG standard or DALI Dimmable driver is optional.
50,000-hour L80 5-year warranty

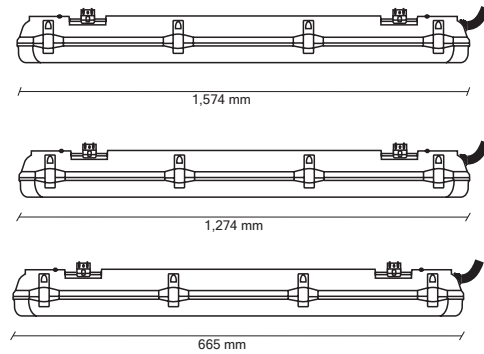

Detailed Product Description of Microwave Motion Sensor

Transmitting Power: 0.5mW Max.
 Operating Frequency: 5.8 GHz ±75 MHz ISM Band.
 Operating Temperature: -25° +60
 Function: 2 Step /3 Step Dimming/ ON/OFF Function
 Detecting Radius: 4m (mounting Height 3m)



Power	20W	36W	56W
LED	SMD	SMD	SMD
Luminous flux 4000K	2,500lm	4,500lm	6,000lm
Dimensions	665mm x 140mm x 90mm	1274mm x 140mm x 90mm	1574mm x 140mm x 90mm
Mounting Options	Surface mounted	Surface mounted	Surface mounted
CRI	80	80	80
4000K Part No	SYNC POD 20804 *Key	SYNC POD 36804 *Key	SYNC POD 56804 *Key

Part number KEY for integrated technologies

- M - Motion sensor
- E - Integrated Standalone Emergency