

CHICANE - B

Litenet presents the Chicane B Range of suspended curving bending pendants, this slim lined lighting system is designed for commercial lighting applications, the Chicane B range offer softer architectural lighting effect ideal for creative working lighting applications this fitting is designed for comfort and mood lighting applications. The Chicane C collection is available in modular lengths so suit many architectural increments this range of circular lights are available in anodised, satin white or matte black powder coat finish. The standard range comes with SMD technology CRI80.

The Chicane C and Chicane B ranges are designed with a generous heat sink using high grade extruded aluminum to maximise heat dissipation which will in turn maximise the life of the LED chip. This range of linear system have deep conical, frosted ugr diffuser or louvre combined with opal diffuser housing to minimise uncomfortable glare.



Integral Non-dimmable ECG standard
Light fitting is designed to 50,000-hour L80 5-year warranty




- SMD 3000K / 4000K
- DC8V -DC42V
- 10-10V, DALI



Power	24W/m
LED	SMD
Luminous flux 3K	1700lm
Luminous flux 4K	1800lm
Dimensions (W H)	50mm x 60mm
DIAMETER	0.6m, 0.8m, 0.9m, 1m, 1.2m, 1.5m, 2m, 2.4m, 3m, 4m, 5m
Beam Angles	90°
CRI	80
3000K Part No	CHICANE B50 803
4000K Part No	CHICANE B50 804

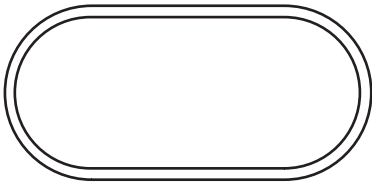


Shape A

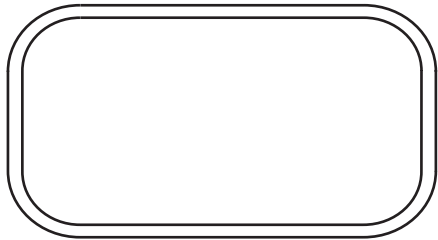

Shape B



Shape C

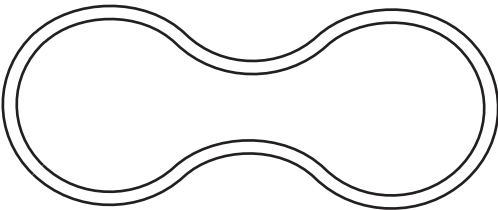

Shape D