

DRONE F

The Drone F is an industrial Light fitting designed for wide area illumination. This fitting is available with 90° or 110° beam angles with CRI80 and 130lm/w and available with two mounting options suspension wire or surface mount bracket.

The body of the Drone F is made with die cast Aluminum for better heat dissipation and finished off with clear PMMA lens.

The Drone F Range is available with Non-dimmable ECG as a standard LED Driver / DALI dimmable driver is optional. CRI90 is also available upon request.

Mounting accessories
Suspension kit

50,000hour L80 5 year warranty



SMD 3030



240V AC





10-10V, DALI

4000K



Silver Grey
Color only

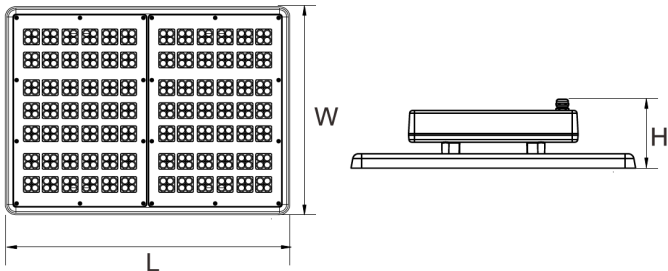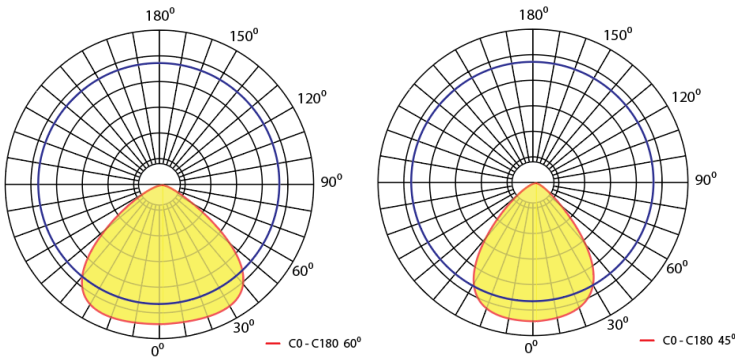

5
WARRANTY



S'DOCS

IES

IP65

IK08





| Power | 60W | 100W | 150W | 200W | 300W |
|----------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Luminous flux 4K | 7,527lm | 12,183lm | 18,274lm | 27,411lm | 36,548lm |
| Dimensions (L W H) | 362 X 257 X 120 mm | 362 X 257 X 120 mm | 362 X 257 X 120 mm | 487 X 362 X 120 mm | 487 X 362 X 120 mm |
| Colour | Silver Grey | Silver Grey | Silver Grey | Silver Grey | Silver Grey |
| Beam angles | 90°, 110° | 90°, 110° | 90°, 110° | 90°, 110° | 90°, 110° |
| CRI | 80 | 80 | 80 | 80 | 80 |
| 4000K Part No | DRONE F 60804 | DRONE F 100804 | DRONE F 150804 | DRONEFV 200804 | DRONE F 300804 |