


ROCK

Litenet presents range of architectural outdoor pathway brick light that comes with range of optics and are ideal for pathway lighting applications with low glare requirements. Main body made with die-casting aluminum and extruded aluminum alloy which provides stability and strength to the fitting. this fitting is designed with clear PMMA diffuser providing UV resistivity for optimal light output. Covered with electrostatic spray treatment.

We use high quality LED chips to achieve high efficiency and border light distri-bution. The ROCK pathway lights are designed outdoor lighting applications. This range is available in satin matte black powder-coat finish. The ROCK is designed for mood lighting the LED chip is set deep in to the fitting providing comfortable area lighting.

50,000 hour life with 5 year Replacement warranty L70

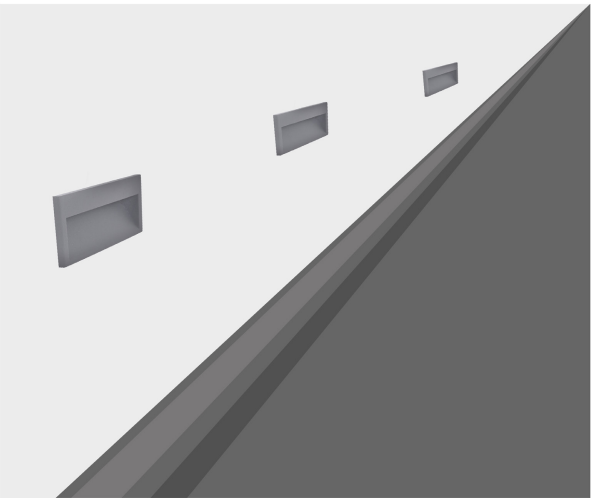


SMD 3000K 4000K



Integral LED driver



Not Dimmable

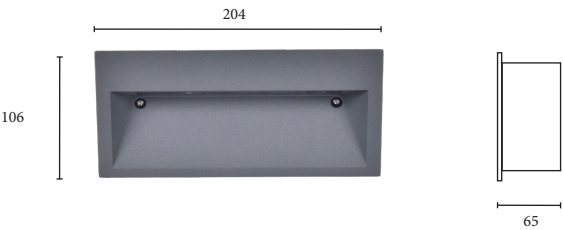

Power	8W	14W
LED	SMD	SMD
INTEGRAL DRIVER		
CCT	3000K / 4000K	3000K / 4000K
Luminous flux	392 lm / 431 lm	431 lm / 465lm
Dimensions (D x H)mm	204x106mm	204x106m
Beam angle	180°	180°
CRI	80	80
3000K Part No	ROCK 10803	ROCK 14804
4000K Part No	ROCK 10804	ROCK 14804