


ROCKET B160

Litenet presents range of architectural bollard outdoor pathway lighting that comes with range of optics and are ideal for pathway lighting applications with low glare requirements. Main body made with die-casting aluminum and extruded aluminum alloy which provides stability and strength to the fitting. this fitting is designed with clear PMMA diffuser providing UV resistivity for optimal light output.

Covered with electrostatic spray treatment. We use high quality LED chips to achieve high efficiency and border light distribution. The Rocket B160 pathway lights are designed outdoor lighting applications. This range is available in satin matte black powder-coat finish. The Rocket B160 is designed for mood lighting the LED chip is set deep in to the fitting providing comfortable area lighting.

50,000 hour life with 5 year Replacement warranty L70

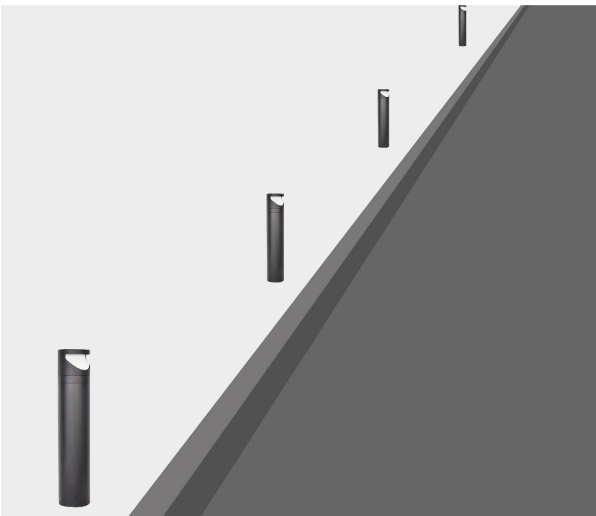


SMD 3000K 4000K



Integral LED driver Not



Dimmable



IES

5yr  
Warranty

180°

IP65

Power	14W	20W
LED	SMD	SMD
INTEGRAL DRIVER		
CCT	3000K / 4000K	3000K / 4000K
Luminous flux	1000 lm / 1140 lm	1400 lm / 1535 lm
Dimensions (D x H)mm	800x160mm	800x160mm
Beam angle	180°	180°
CRI	80	80
BLACK FINISH Part No	ROCKET B160	ROCKET B160
WHITE FINISH Part No	ROCKET B160	ROCKET B160