
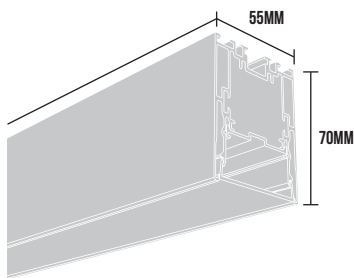


S55

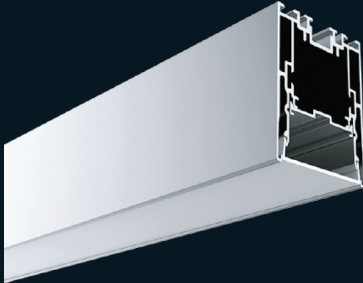

Features:

Sleek modern design aluminium profile with 55mm of width.

Versatile profile suitable for all applications, i.e. recessed, surface mount and suspended.

Choice of up and down profile for direct and indirect lighting. Flexible roll diffuser for continuous lengths.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Clean-cut magnetic end-caps, no screws.

Seamless joints with speedy connectors.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI 85.

Choice of integral or remote driver.

Incremental length 50mm.

Available with suspension wires, brackets for surface mount and trimless recessed installations.

Life: 50,000 hours L90/B10.

ITEM CODE	WATTAGE	COLOR TEMP	DALI (DM)	LED LUMEN
551225	25W	2700K	1000 X 55 X 70	2240LM/M
551325	25W	3000K	1000 X 55 X 70	2300LM/M
551425	25W	4000K	1000 X 55 X 70	2400LM/M

Materials



Extruded aluminium profiles with high quality durable UV stabilized diffuser.



FINISH: Matt Black, Matt White, Silver

Applications

Offices, hospitality, schools, hospitals, malls, accent lighting, retails, large indoor open areas.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming

- **CRI 95+**

- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K

- **Individual luminaire or continuous runs**

- **Customised wattages for up/down lighting**

- **Emergency modules**

- **Bends :**

