
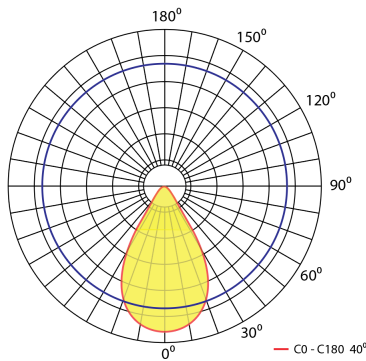


DLE 99

Litenet presents a range of recessed downlights that are ideal for uniform lighting applications with low glare requirements. The DLE range of downlights is designed for commercial lighting applications. This range of fixed-down lights is available with selectable CCT technology with 3000K, 4000K, and 5000K. This low profile downlight are a high performer with over 100-110lm/w it is suited for many indoor or outdoor lighting applications this range is available in satin white or matte black powder coat finish. This range of downlights offers two different optics therefore the reflector is interchangeable, different reflectors are used to accommodate mood lighting. As a standard, this range comes with high quality SMD LED technology with CRI85.

Non-dimmable ECG standard, Phase Dim/DALI is optional.
50,000 hour life 5 year warranty L70



- SMD 3000K 4000K
- DC36V 450mA 600mA
- non Dim, 10-10V, DALI
- 150mm



Power	18W	22W
LED	COB	COB
Output current	450mA	600mA
CCT	3000K or 4000K	3000K or 4000K
Luminous flux	2073lm or 2303lm	2404lm or 2446lm
Dimensions (D x H)mm	160x95mm	160x95mm
Beam angle	41°	41°
CRI	85	85
Part No	DLE99 18803.IP	DLE99 22803.IP
Part No.	DLE99 18804.IP	DLE99 22804.IP