



DLE 77

Litenet presents a range of recessed downlights that are ideal for uniform lighting applications with low glare requirements. The DLE range of downlights is designed for commercial lighting applications. This range of fixed-down lights is available with selectable CCT technology with 3000K, 4000K, and 5000K. This low profile downlight are a high performer with over 100-110lm/w it is suited for many indoor or outdoor lighting applications this range is available in satin white or matte black powder coat finish. This range of downlights offers two different optics therefore the reflector is interchangeable, different reflectors are used to accommodate mood lighting. As a standard, this range comes with high quality SMD LED technology with CRI85.

Non-dimmable ECG standard, Phase Dim/DALI is optional.

50,000 hour life 5 with year warranty L70

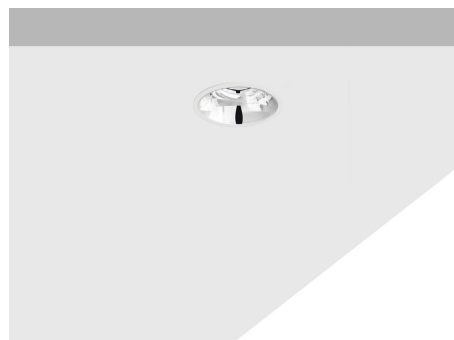

	SMD	3000K	4000K
	DC36V	250mA	350mA
	non Dim, 10-10V, DALI		
	95mm		



Power	10W	14W
LED	C08	C08
Output current	250mA	350mA
CCT	3000K or 4000K	3000K or 4000K
Luminous flux	1005lm or 1089lm	1353lm or 1377lm
Dimensions (D x H)mm	110x95mm	110x95mm
Beam angle	38°	38°
CRI	85	85
Part No	DLE77 10803.IP	DLE77 15803.IP
Part No.	DLE77 10804.IP	DLE77 15804.IP